



TERRACE SYSTEMS


2026/2027





MB 77 HS

Terrace system

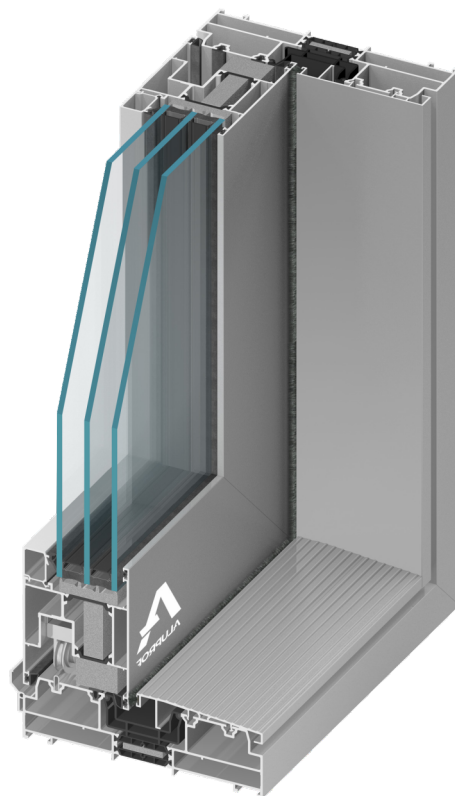

LIFT-AND-SLIDE DOORS

AVAILABLE DIFFERENT DOOR CONFIGURATIONS

AVAILABLE VERSION WITH LOW THRESHOLD DOOR

- Frame depth: 174 mm (2-rail profile), 271 mm (3-rail profile)
- Sash depth: 77 mm
- Glazing thickness: 13,5 – 58,5 mm
- Air permeability: class 4, EN 12207
- Waterproof: class 9A, EN 12208


- Thermal insulation: U_w from 0,84 W/(m²K)*
- Wind load resistance: up to class C4, EN 12210
- Construction with a leaf weight of up to 600 kg, height up to 3.2 m and width up to 3.3 m
- Narrow mullion with a width of 47 mm or 50 mm
- Wide range of colours

* U_w for MB-77HS HI doors with leaf dimensions of 3.0×2.9 m, with $U_g=0.5$ W/(m²K) glass with Chromatech Ultra frame.



MB 59 HS

Terrace system

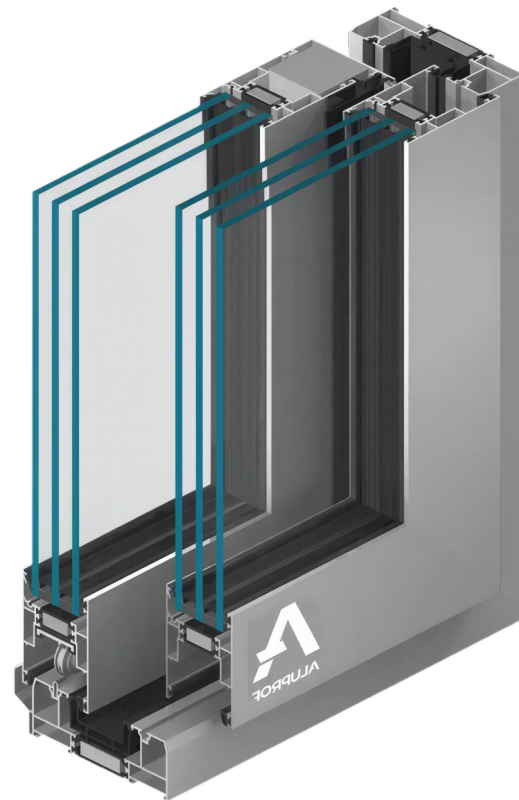

LIFT-AND-SLIDE DOORS

SLENDER AND ROBUST, 3-CHAMBERED PROFILES

AVAILABLE VERSION WITH LOW THRESHOLD DOOR

- Frame depth: 120 mm (2-rail profile), 199 mm (3-rail profile)
- Sash depth: 59 mm
- Glazing thickness: up to 42 mm
- Air permeability: class 3, EN 12207
- Waterproof: class 7A, EN 12208

- Thermal insulation: U_f from 1,8 W/(m²K)*
- Wind load resistance: up to class C2, EN 12210
- Large permissible dimensions of door leaves: height up to 2.8 m, width up to 3.3 m
- Fixed panels can be made with glass mounted directly into the frame
- Doors can be installed in custom-built settings as well as in larger constructions

*Please contact your distributor for further details.



PLATINUM PARTNER



21 Royal Rock,
Ballybane Industrial Estate
Galway
H91 X032

Contact:
091 773 514
info@topspec.ie
www.topspec.ie